



## ANSMANN WL11500R

Double LED spotlight (2× 36W) with integrated stand for battery and mains operation

### Features

- Work spotlight for battery or mains operation, flexible use thanks to rotatable and tilting LED modules
- With 2× 36W SMD LED modules with a lighting power of up to 11500 lm
- Three brightness levels can be selected via the on/off switch
- Two different LED colours can be selected: 4000K or 6500K
- Strong holding magnets and integrated hanging hooks in the lamp base
- Including Tripod for easy mounting/dismounting > Fold-out feet and integrated ground spikes
- Can also be used without a socket – integrated Li-ion battery pack 14,8V/4000mAh/59,2Wh with safety electronics
- LED rechargeable battery capacity indication – checking the available capacity
- Includes suitable charger for mains operation with quick-connect plug
- Integrated USB charging socket
- Splash-proof and shock-resistant housing
- Very compact format in transport mode
- Holder for mains adapter and cable winding device included



High Power LED



Luminous flux



Charging time



Splashproof



Shock resistance




180° rotatable



Powerbank function



Rechargeable Li-Ion  
battery

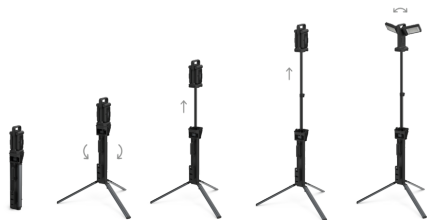

Article number: 1600-0600

Product content: LED work spotlight, tripod, charger with cable, operating instructions



## Specifications

|                         |                                          |            |                    |                       |                    |                        |                      |
|-------------------------|------------------------------------------|------------|--------------------|-----------------------|--------------------|------------------------|----------------------|
| Nominal capacity        | 4000 mAh                                 |            |                    |                       |                    |                        |                      |
| Illuminant              | Mode                                     | Illuminant | Illuminant power   | Lamp life             | Optical system     | Colour temperature     | Wellenlänge (Spitze) |
|                         | 100                                      | LED        | 72 W               | 10000                 |                    |                        |                      |
| Illuminant power        | 72 W                                     |            |                    |                       |                    |                        |                      |
| Maximum luminous flux   | 11.500 lumens                            |            |                    |                       |                    |                        |                      |
| Maximum brightness      | 19.200 Lux                               |            |                    |                       |                    |                        |                      |
| Protection class        | IPX4                                     |            |                    |                       |                    |                        |                      |
| Maximum operating time  | 6 hrs.                                   |            |                    |                       |                    |                        |                      |
| Power supply            | Li-ion battery pack 14,8V/4000mAh/59,2Wh |            |                    |                       |                    |                        |                      |
| Performance data        | Mode                                     |            | Colour temperature | Maximum luminous flux | Maximum brightness | Maximum operating time |                      |
|                         | 100                                      |            | 6500 K             | 11.500 lumens         | 19.200 Lux         | 1,5 hrs.               |                      |
|                         | 50                                       |            | 6500 K             | 5.750 lumens          | 9.600 Lux          | 3 hrs.                 |                      |
|                         | 20                                       |            | 6500 K             | 2.000 lumens          | 3.200 Lux          | 6 hrs.                 |                      |
|                         | Netzbetrieb                              |            | 6500 K             | 3.700 lumens          | 6.070 Lux          | 24 hrs.                |                      |
|                         | 50                                       |            | 4000 K             | 11.000 lumens         |                    | 1,5 hrs.               |                      |
|                         | 50                                       |            | 4000 K             | 5.500 lumens          |                    | 3 hrs.                 |                      |
|                         | 20                                       |            | 4000 K             | 1.900 lumens          |                    | 6 hrs.                 |                      |
|                         | Netzbetrieb                              |            | 4000 K             | 3.500 lumens          |                    | 24 hrs.                |                      |
| IK Protection Class     | IK07                                     |            |                    |                       |                    |                        |                      |
| Colour temperature      | 6500 K                                   |            |                    |                       |                    |                        |                      |
| Energy efficiency class | F                                        |            |                    |                       |                    |                        |                      |
| Housing material        | Aluminium, ABS, PCS, nylon, fibreglass   |            |                    |                       |                    |                        |                      |
| Color                   | black / grey                             |            |                    |                       |                    |                        |                      |
| Packaging               | cardboard box                            |            |                    |                       |                    |                        |                      |
| Operating temperature   | -20 - 40 °C                              |            |                    |                       |                    |                        |                      |

|                     |             |
|---------------------|-------------|
| Storage temperature | -20 - 25 °C |
|---------------------|-------------|

|            |                    |
|------------|--------------------|
| Dimensions | 148 × 215 × 850 mm |
|------------|--------------------|